



- Oblik ugradnje
- Mounting form

U

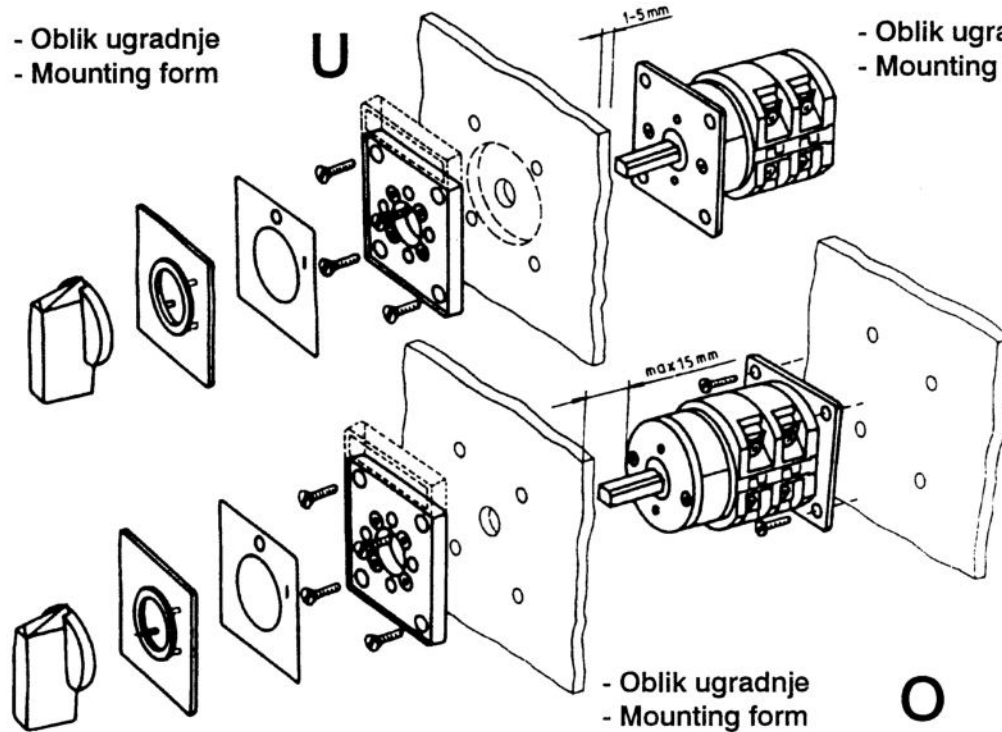

- Oblik ugradnje
- Mounting form

P

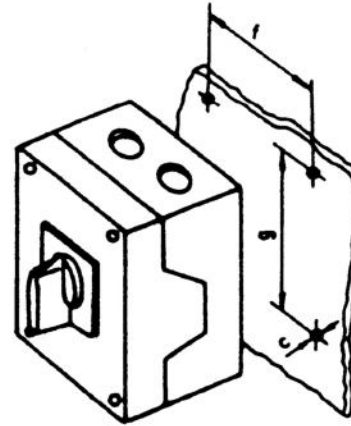

- Oblik ugradnje
- Mounting form

O

Kućišta Casings	Sklopke Switches	Broj elemenata Number of elements		Plan bušenja rupa Drilling plan for panel		
Tip/Type		Nisko Low	Visoko High	f	g	Φc
75x75	GN12	1-2	3-4	64	50	4,5
	GN20	1-2	3-4			
	GN25	1	2-3			
90x90	GN20	1-3	4-6	63	79	4,5
	GN25	1-2	3-4			
	GN32	1-2	3-4			
	GN40	1	2-3			
110x110	GN20	1-4	5-7	83	98,4	4,5
	GN25	1-3	4-5			
	GN32	1-3	4-5			
	GN40	1-2	3-5			
	GN63	1-2	3-4			
125x175	GN32	1-3	4-5	112	146	5,5
	GN40	1-2	3-4			
	GN63	1-2	3-4			
	GN125	1	2			
180x254	GN125	1-2	3-4	190	120	5,3

PLAN BUŠENJA RUPA - DRILLING PLAN FOR PANEL

GN	a	b	c	d	e	GN
	□	Φ	Φ	Φ	□	
12				40		-
20	36	12	5	42	36	-
25				44		-
32						12H
40	48	14	5	60	48	20H
-						25H
63	48	14	5	-	68	-
125	68	16	6	85	68	32H
						40H
						63H

- Za oblik ugradnje
- For mounting form

U

- Za oblik ugradnje
- For mounting form

O


Tip sklopke Switch type		GN12 GN12H	GN20 GN20H	GN25 GN25H	GN32 GN32H	GN40 GN40H	GN63 GN63H	GN125		
Opća upotreba AC1/AC21 General use		16A (690V)	20A (690V)	25A (690V)	32A (690V)	40A (690V)	63A (690V)	125A (690V)		
Motorska sklopka za kategoriju upotrebe Motor switch in utilization category	3 Faze Phase AC3	220/230 380-440 500-690	2,5 4 5,5	3 5,5 5,5	5,5 7,5 7,5	7,5 11 11	8 15 15	11 18,5 18,5	18,5 37 33	
		1 Faza Phase	110 220/230	0,8 1,5	0,8 2,2	1,5 3	2,2 4	3 6,5	3,7 6,5	5 11
			2 Pola Pole	220/230 380-440	1,5 2,2	2,2 3	3 5,5	4 6,5	6,5 8	6,5 11,5
	(kw)									
		3 Faze Phase AC23	220/230 380-440 500-690	3 6 7,5	5 7,5 7,5	6,5 11 11	8 15 18,5	8 18,5 22	12,5 30 30	30 45 37
			1 Faza Phase	110 220/230	0,8 1,7	0,8 2,5	1,5 3,7	2,2 5	3 6	3,7 7,5
	2 Pola Pole			220/230 380-440	1,7 3	2,5 3,7	3,7 5,5	5 8	6 11	7,5 12,5

Suitable for use with Class RK5 fuses, on a circuit capable of delivery not more than 5 kA RMS symmetrical amperes, 600 V ac.


Protected fuse : 35A RK5 5kA, 240V
40A RK5 5kA, 600V




**SKLOPKE SA KUTEM ZAKRETA 60°
SWITCHES WITH 60° SWITCHING**

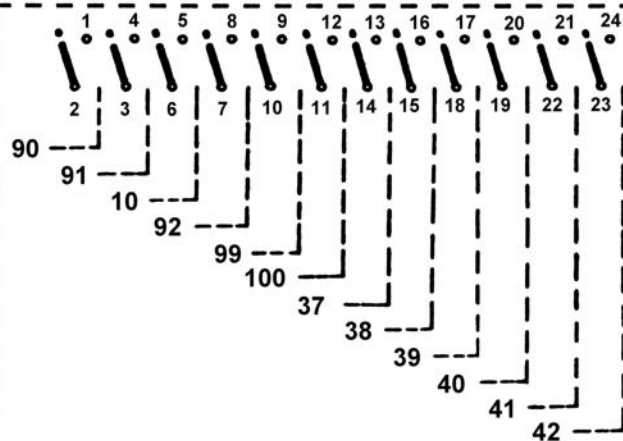


**PREKLOPKE SA "0" POLOŽAJEM SA
KUTEM ZAKRETA 60°
CHANGEOVER SWITCHES WITH "0" 60° SWITCHING**

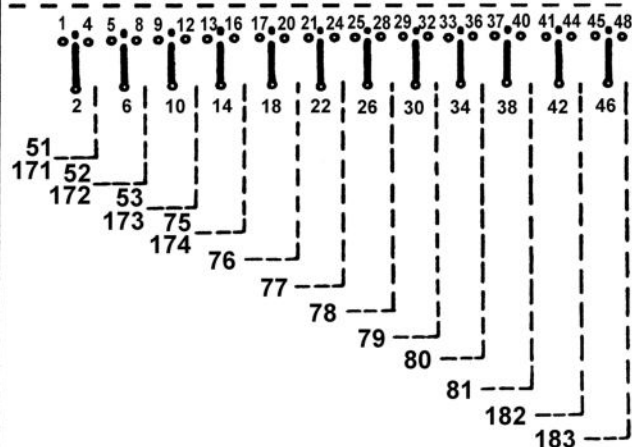


**PREKLOPKE BEZ "0" POLOŽAJA SA
KUTEM ZAKRETA 90°
CHANGEOVER SWITCHES WITHOUT "0" 90° SWITCHING**

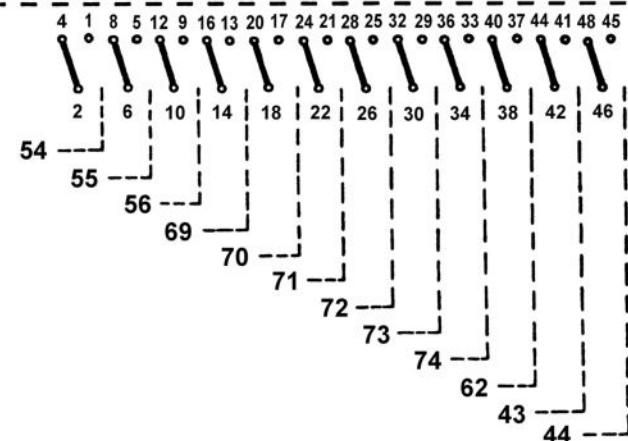



SKLOPKE SA KUTOM ZAKRETA 90° / SWITCHES WITH 90° SWITCHING




09




57




STEPENASTE SKLOPKE BEZ "0" POLOŽAJA / MULTI-STEP SWITCHES WITHOUT "0"

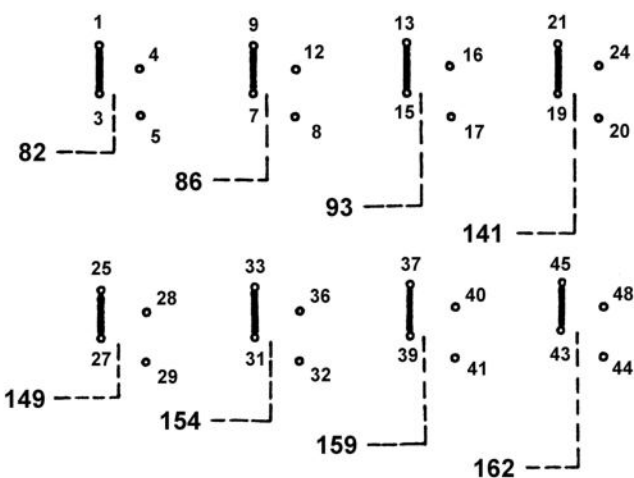


AMPERMETARSKE SKLOPKE / AMMETER SWITCHES

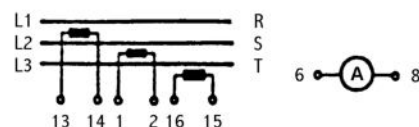

58

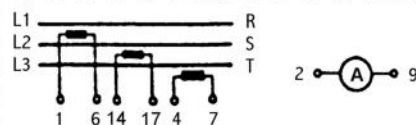


97




98

VOLTMETARSKO - AMPERMETARSKE SKLOPKE VOLTMETER - AMMETER SWITCHES

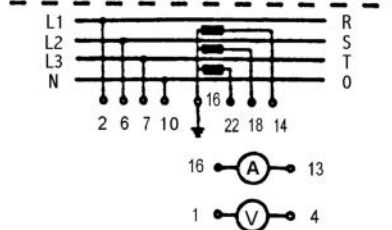


61




64


VOLTMETARSKE SKLOPKE / VOLTMETER SWITCHES




60




66



67






68

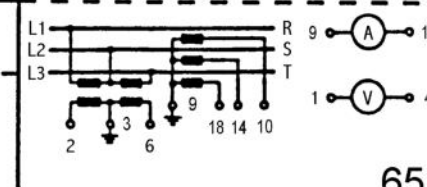


65


SKLOPKE SA POVRATOM - KUT ZAKRETA 30° SWITCHES SPRING RETURN WITH 30° SWITCHING




SKLOPKE ZA POKRETANJE JEDNOFAZNIH MOTORA START AND RUN SWITCHES




15



16





50, 17




59


UPRAVLJAČKE SKLOPKE SA POVRATOM / CONTROL SWITCHES (WITH SPRING RETURN)



207

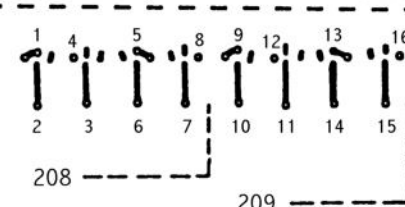


208

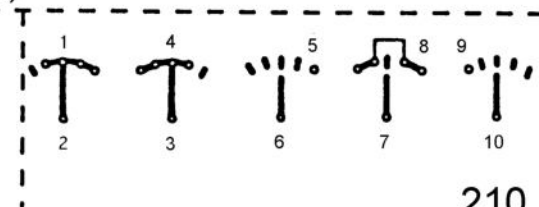


210


MOTORSKE REVERZIONE SKLOPKE / MOTOR REVERSING SWITCHES




166, 11




14




24



25




26

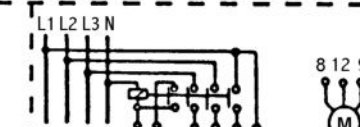


27


ZVIJEZDA - TROKUT SKLOPKE / STAR - DELTA SWITCHES

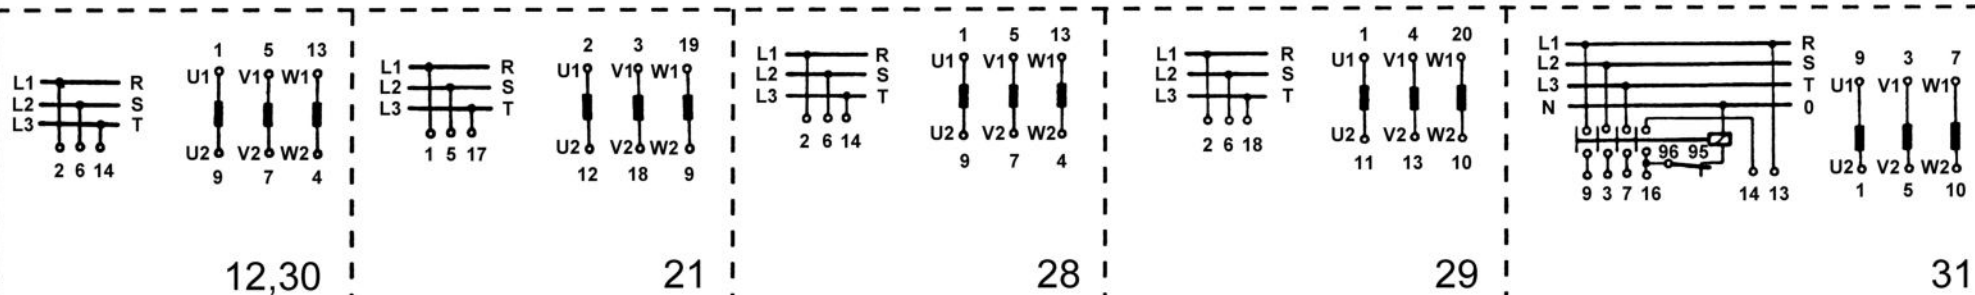


SKLOPKE ZA UPRAVLJANJE MOTORIMA (ODVOJENI NAMOTI) MOTOR CONTROL SWITCHES (SEPARATE WINDINGS)

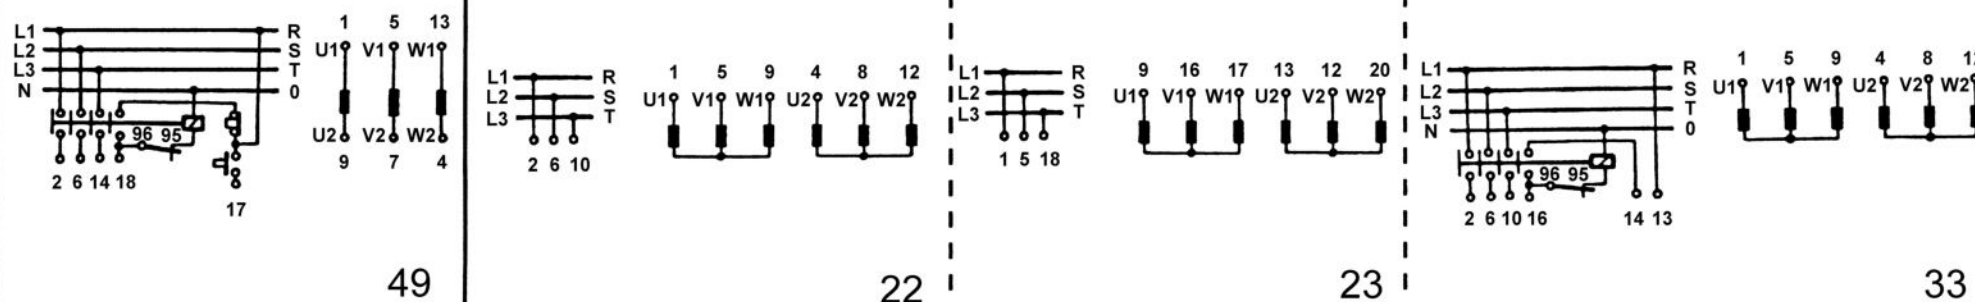


SKLOPKE ZA UPRAVLJANJE MOTORIMA (DAHLANDER) / MOTOR CONTROL SWITCHES (DAHLANDER)

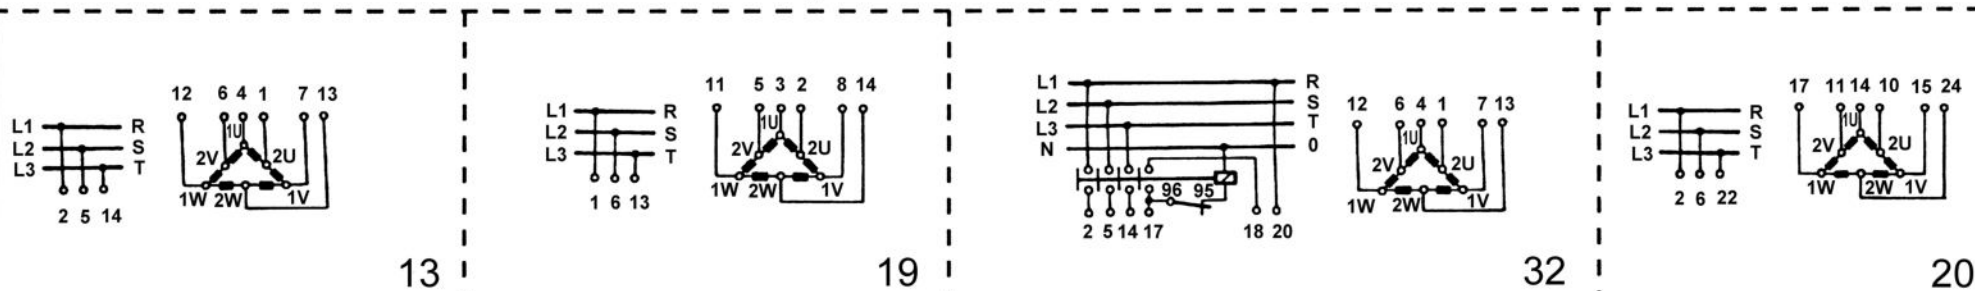


SKLOPKE ZA UPRAVLJANJE TROBRZINSKIM MOTORIMA / SWITCHES FOR 3-SPEED MOTOR CONTROL

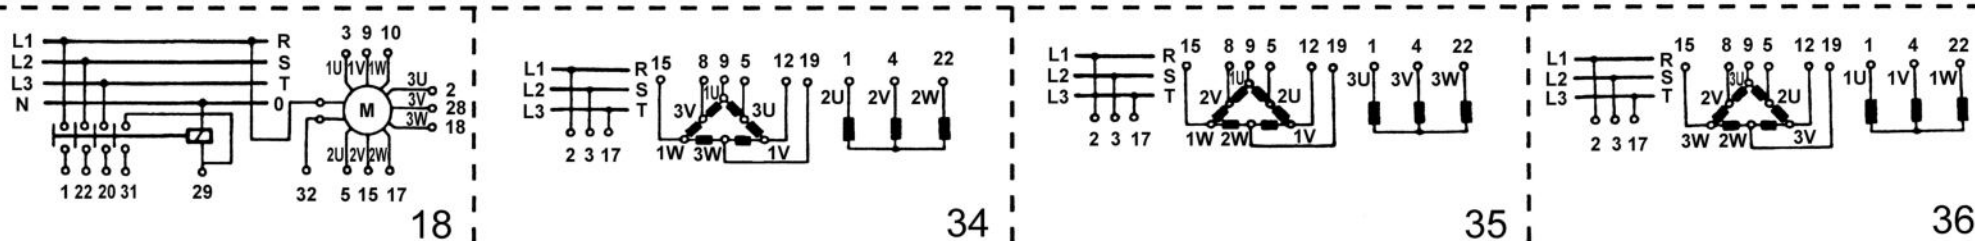






STEPENASTE SKLOPKE BEZ "0" POLOŽAJA / MULTI-STEP SWITCHES WITHOUT "0"

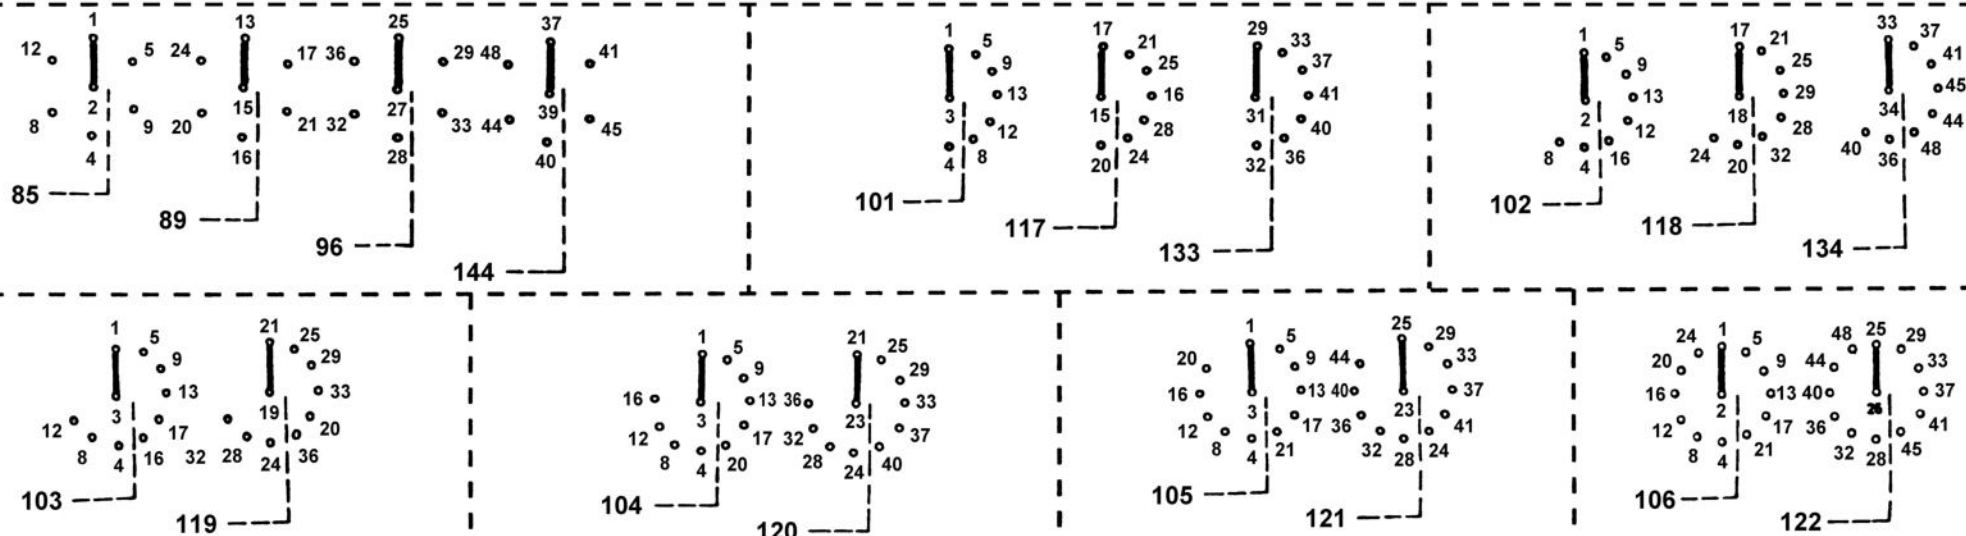











STEPENASTE SKLOPKE SA "0" POLOŽAJEM / MULTI-STEP SWITCHES WITH "0"

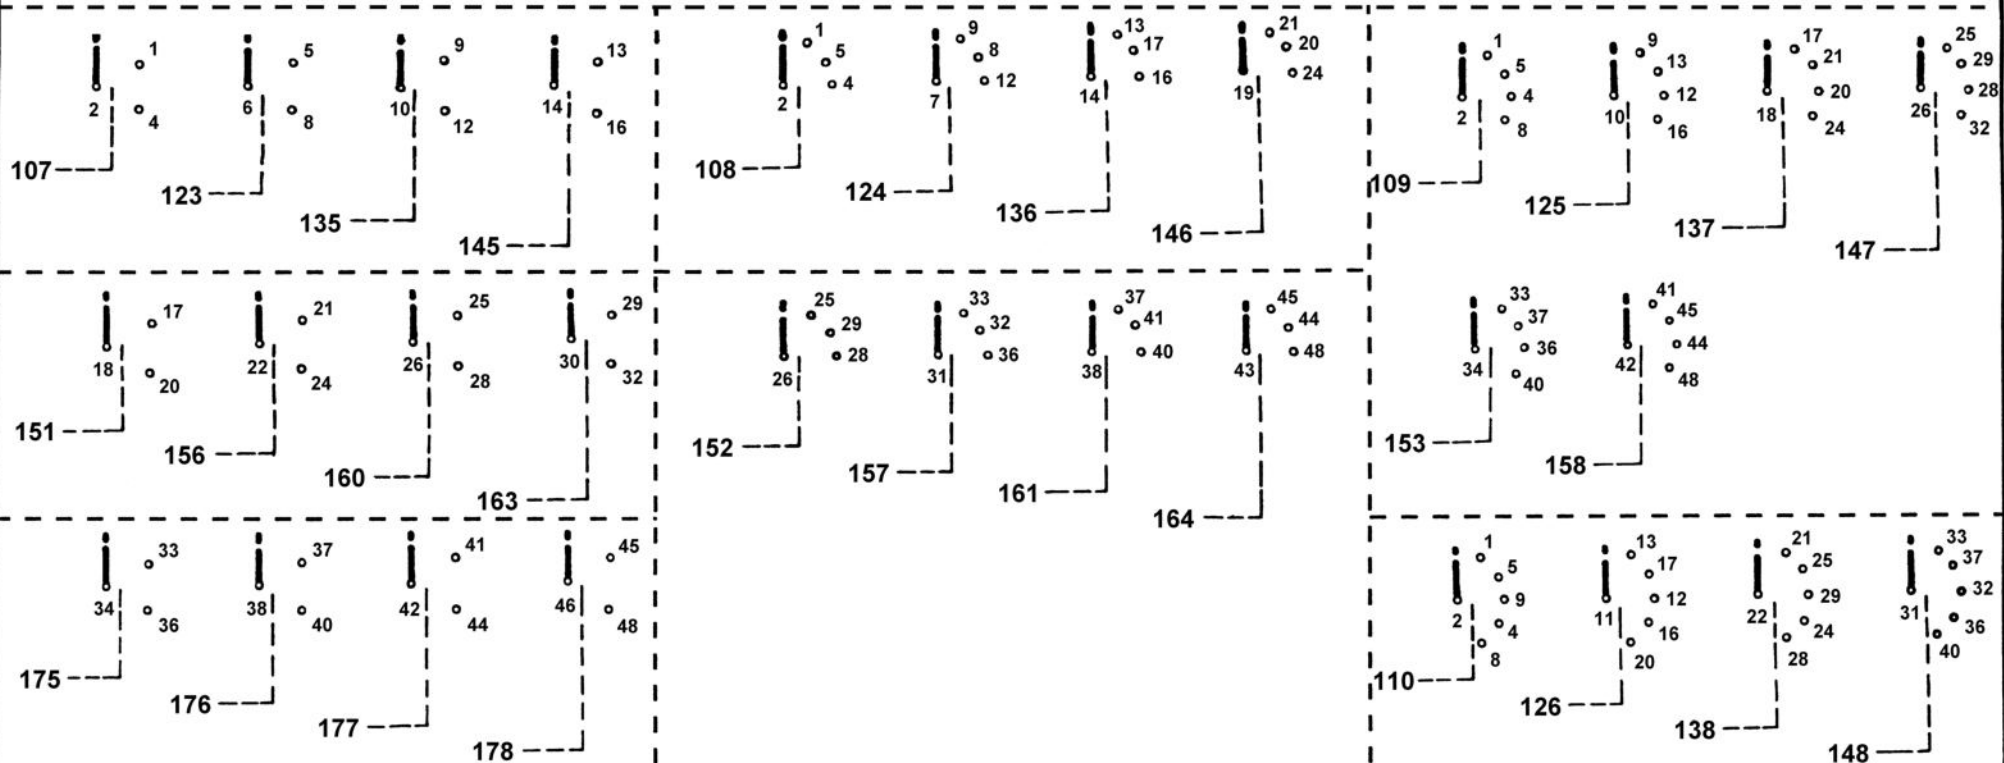

STEPENASTE SKLOPKE SA "0" POLOŽAJEM / MULTI-STEP SWITCHES WITH "0"

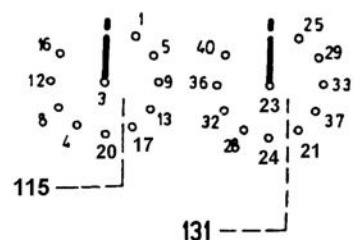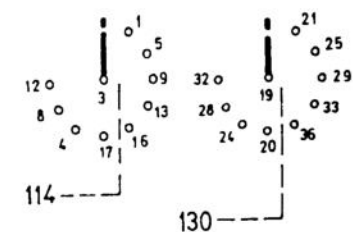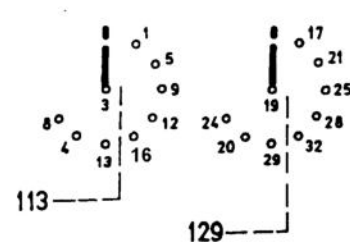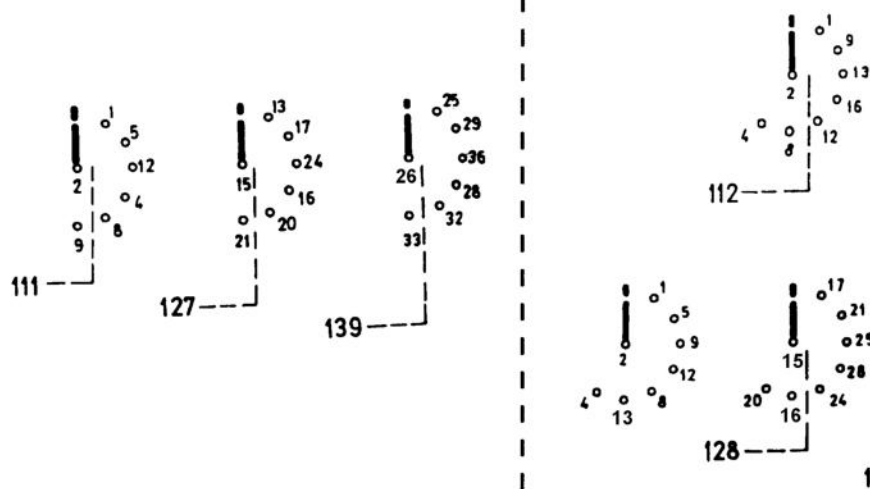

GRUPNE SKLOPKE / GANG SWITCHES

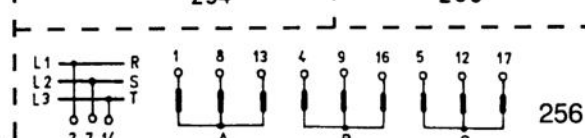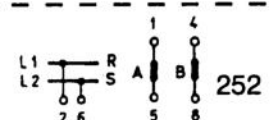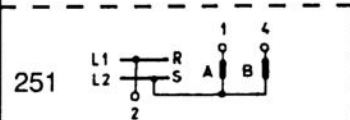

260