

TIP SKLOPKE <i>SWITCH TYPE</i>			CS16 CS16H	CS25 CS25H	CS32 CS32H	CS40R CS40RH	CS40	CS63	CS80	CS100	CS125	CS160	CS200
Nazivni izolacijski napon <i>Rated insulation voltage</i>	U_i (IEC 60947)	V	690	690	690	690	690	690	690	1000 ⁽²⁾	1000 ⁽²⁾	1000 ⁽²⁾	1000 ⁽²⁾
Nazivni udarni podnosivi napon <i>Rated impulse withstand voltage</i>	U_{imp} (III/3) ⁽¹⁾	kV	6	6	6	6	6	6	6	8	8	8	8
Nazivna termička struja <i>Rated thermal current</i>	I_{th} (IEC 60947)	A	16	25	32	40	40	63	80	100	125	160	200
Nazivna kratkotrajna podnosiva struja <i>Rated short-time withstand current</i>	I_{cw} / 1 sec.	A	400	500	600	600	1100	1300	1400	2600	2800	3000	3000
Max. veličina osigurača za zaštitu od kratkog spoja <i>Max. fuse size for short circuit protection</i>	I_n 10kA gG charac. 25kA 50kA	A	35	35	35	40	80	80	80	160	160	160	200
		A	32	32	32	32	63	63	63	160	160	160	160
		A	32	32	32	32	63	63	63	160	160	160	160
Nazivna pogonska struja <i>Rated operational current</i>	I_e AC1/AC21A	A	16	25	32	40	40	63	80	100	125	160	200
Motorska sklopka za kateg. upotrebe <i>Motor switch in utilization category</i>	AC3 IEC/VDE/BS 3 faze 500V 690V	220/240V	kW	3,7	5,5	7,5	7,5	11	11	15	30	37	37
		380/440V	kW	5,5	7,5	11	11	15	22	25	55	59	63
		500V	kW	7,5	11	15	15	22	25	30	59	63	75
		690V	kW	7,5	11	15	15	22	25	25	40	45	45
	AC23 IEC/VDE/BS 3 faze 500V 690V	220/240V	kW	4	7,5	9	9	11	15	18,5	30	37	40
		380/440V	kW	7,5	11	15	15	18,5	25	30	59	63	75
		500V	kW	9	15	15	15	22	30	37	63	75	80
		690V	kW	9	15	15	15	22	30	30	51	55	55
Presjek vodiča <i>Conductor size</i>	r = jednožilni / <i>rigid</i> f = višezilni / <i>flexible</i> max. r/f	mm ²	10/6	10/6	10/6	10/6	25/16	25/16	25/16	70/50	70/50	70/50	95/70 ⁽³⁾
		AWG	8/10	8/10	8/10	8/10	4/6	4/6	4/6	00/0	00/0	00/0	000/11 ⁽³⁾


(1) vrijedi za mreže sa uzemljenim zvjezdastim, prenaponska kategorija III, stupanj zagađenja 3 / valid for neutral earthed systems, overvoltage category III, pollution degree 3

(2) iznad 690V samo za kategoriju upotrebe AC20A / suitable for no load switching applications (AC20A) above 690V

(3) kabelski priključak / cable lug

POMOĆI KONTAKTI *AUXILIARY CONTACTS*

Nazivni izolacijski napon <i>Rated insulation voltage</i>	U_i (IEC 60947)	V	690
Nazivna termička struja <i>Rated thermal current</i>	I_{th} (IEC 60947)	A	10
Nazivna pogonska struja <i>Rated operational current</i>	I_e 110V AC15 220-240V 380-400V 660-690V	A	8
		A	8
		A	3
		A	1
Presjek vodilica <i>Conductor size</i>	r = jednožilni / <i>rigid</i> f = višezilni / <i>flexible</i> max. r/f	mm ²	1,5/1,5
		AWG	14/14

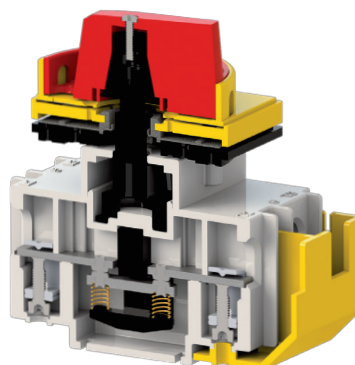

UGRADNE VELIČINE *MOUNTING SIZES*

A0	A1	A2
CS16 CS25 CS32 CS40R	CS16H CS25H CS32H CS40RH CS40 CS63 CS80	CS100 CS125 CS160 CS200