


ROTARY CAM SWITCHES GF SERIES

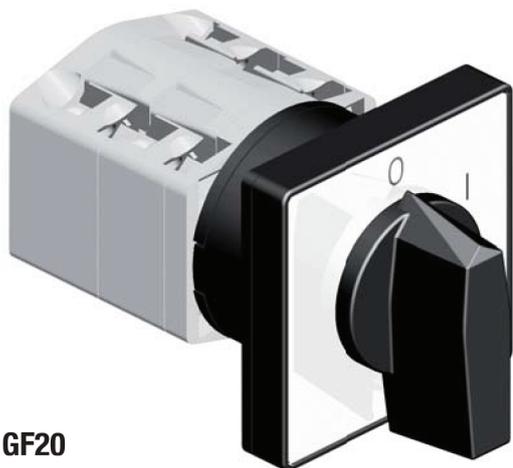

 **Lovato**
electric

ENERGY AND AUTOMATION


GF20
GF10

GREBENASTE SKLOPKE serije GF pripadaju seriji grebenastih sklopki zaštićenih od slučajnog dodira (svi priključci i kratkospojnice) - DIN/EN 61140. Konstruirane su prema suvremenim principima i dostignućima na području sklopnih aparata uz upotrebu najkvalitetnijih izolacijskih i kontaktnih materijala. Odlikuju se visokim sklopnim moćima, električnom i mehaničkom trajnošću, kao i malim dimenzijama.

Svoju primjenu nalaze u glavnim i pomoćnim strujnim krugovima kao na primjer: motorska sklopka (sklapanje, upravljanje i pokretanje trofaznih i jednofaznih motora) u kategoriji upotrebe AC3, AC23; teretna sklopka (za sklapanje neinduktivnih ili slabo induktivnih tereta) u kategoriji upotrebe AC1 odnosno AC21, te sklopka za upravljačke i mjerne strujne krugove u kategoriji upotrebe AC15.

Sklopke mogu imati najviše 12 upravljačkih položaja, a mogu se izvesti s kutom zakreta od 30°, 45°, 60° i 90°.

Kod sklopki gdje se traži prednji sklop veći od standardnog, sklopke imaju oznaku H (npr. GF20H).

Sklopke GF10 i GF20 mogu se izraditi s pozlaćenim kontaktima.

Grebenaste sklopke serije GF udovoljavaju mnogim internacionalnim i nacionalnim propisima kao što su: **IEC 60947, IEC 60204, DIN EN 61058, UL 508, C22.2 No. 14** itd.

ROTARY CAM SWITCHES series GF is the series of rotary cam switches protected from inadvertent touch (all connections and possible short circuiting devices) - DIN/EN 61140. They have been designed on modern principles taking into consideration the latest achievements in the field of switching devices and using the best insulation and contact materials. They are distinguished for their high breaking capacity, electrical and mechanical durability and small dimensions.

They are used in main and auxiliary circuits such as: motor switch (switching, control and starting of three-phase and single-phase motors) in the utilization categories AC3 and AC23; load break switch (for switching of non-inductive or slightly inductive loads) in the utilization category AC1 or AC21 and cam switch for control and measuring circuits in the utilization category AC15.

Rotary cam switches can have maximum 12 control positions, with turning angles of 30°, 45°, 60° and 90°.

At the switches where is front part bigger than standard size required, the switches are marked with H (e.g. GF20H).

GF10 and GF20 can be supplied with gold-plated contacts.

Rotary cam switches series GF comply with many international and national standards such as: IEC 60947, IEC 60204, DIN EN 61058, UL 508, C22.2 No. 14 and many others.

TIP TYPE	Max. broj elem. Max number of elements	Oblik ugradnje Mount. form	Ugrad. veličina Mounting size	I _{th} , U _{i~}
GF10	8	Ugradna/Front mount. - U	A00 (□30 mm)	10A, 480V
GF20	12	Ugradna/Front mount. - U Odvojena/Rear mount. - O	A0 (□48 mm)	20A, 480V
GF10H	8	Ugradna/Front mount. - U	A0 (□48 mm)	10A, 480V
GF20H	12	Ugradna/Front mount. - U Odvojena/Rear mount. - O	A1 (□65 mm)	20A, 480V
GF20R	5	Ugradna/Front mount. - U	A00 (□30 mm)	20A, 480V

H - veći prednji sklop od standardnog / bigger front part than standard

R - manji prednji sklop za GF20 (A00) / smaller front part for GF20 (A00)

TIP SKLOPKE SWITCH TYPE			GF10 GF10H	GF20 GF20H GF20R
Nazivni izolacijski napon Rated insulation voltage	U _i	V	480	480
Nazivni udarni podnosivi napon Rated impulse withstand voltage	U _{imp}	kV	4	4
Nazivna termička struja Rated thermal current	I _{th}	A	10	20
Glavna sklopka / Main switch				
- najveća vrijednost nazivnog pogon. napona - max. value of rated operational voltage		V	400	480
Nazivna kratkotrajna podn. struja Rated short-time withstand current	I _{cw} 1sec	A	250	250
Nazivna pogonska struja Rated operational current	I _e	AC1/AC21A AC15 220/230V 380-440V	A 10 A 3 A 2	20 8 6
Motorska sklopka za kateg. upotrebe:	3 phase AC3	220/230V 380-440V	kW 1,5 kW 2,2	3 5
Motor switch in utilization category:	3 phase AC23	220/230V 380-440V	kW 1,8 kW 3	5 7,5
Max. veličina osigurača za zaštitu od kratkog spoja	I _n (gG/gL)	3kA 5kA 10kA 25kA	A 16 A 16 A 10 A -	20 20 20 20
Max. fuzi size for short circuit protection				
Presjek vodiča Conductor size	max. r/f	2 x $\frac{\text{mm}^2}{\text{AWG}}$	1,5/1,5 14/14	2,5/2,5 12/12
r = jednožilni / rigid f = višežilni / flexible	min. r/f	2 x $\frac{\text{mm}^2}{\text{AWG}}$	0,5/0,5 20/20	0,5/0,5 20/20



POSEBNE IZVEDBE *OPTIONAL EXTRAS*

KOD *CODE*

		1	2	3	4
STANDARDNE SKLOPKE / STANDARD SWITCHES	<p>UGRADNA SKLOPKA</p> <p><i>FRONT MOUNTING</i></p> 	<p>Prednji sklop □30 / <i>Front assembly</i> □30</p> <p>Prednji sklop □48 / <i>Front assembly</i> □48</p> <p>Prednji sklop □30 s natpisom / <i>Front assembly</i> □30 with title</p> <p>Prednji sklop □48 s natpisom / <i>Front assembly</i> □48 with title</p> <p>Prednji sklop □48 / <i>Front assembly</i> □48</p> <p>Prednji sklop □65 / <i>Front assembly</i> □65</p>	<p>GF10 - ... - U</p> <p>GF20 - ... - U</p> <p>GF10 - ... - U</p> <p>GF20 - ... - U</p> <p>GF10H - ... - U</p> <p>GF20H - ... - U</p>		<p>N</p> <p>N</p>
	<p>Blokada lijevog smjera okretanja / <i>Interlocking of anticlockwise rotation</i></p> <p>Zaštita IP65 / <i>Front protection</i> IP65</p> <p>Zaštita IP65 / <i>Front protection</i> IP65</p>	<p>GF20 - ... - U</p> <p>GF10 - ... - U</p> <p>GF20 - ... - U</p>		<p>28</p> <p>51</p> <p>51</p>	
STANDARDNE SKLOPKE / STANDARD SWITCHES	<p>SKLOPKA ZA ODVOJENU UGRADNJU</p> <p><i>REAR MOUNTING</i></p> 	<p>Prednji sklop □48 / <i>Front assembly</i> □48</p> <p>Prednji sklop □48 s natpisom / <i>Front assembly</i> □48 with title</p> <p>Prednji sklop □65 / <i>Front assembly</i> □65</p> <p>Prednji sklop □65 s natpisom / <i>Front assembly</i> □65 with title</p>	<p>GF20 - ... - 0</p> <p>GF20 - ... - 0</p> <p>GF20H - ... - 0</p> <p>GF20H - ... - 0</p>		<p>N</p> <p>N</p>
	<p>Blokada lijevog smjera okretanja / <i>Interlocking of anticlockwise rotation</i></p> <p>Zaštita IP65 / <i>Front protection</i> IP65</p>	<p>GF20 - ... - 0</p> <p>GF20 - ... - 0</p>		<p>28</p> <p>51</p>	
SKLOPKA SA ZAKLJUČAVANJEM LOKOTOM	<p><i>SWITCH WITH PADLOCK</i></p> 	<p>Ručica i prednja ploča sive boje</p> <p><i>The grey colour of handle and front plate</i></p>	<p>GF10H - ... - U</p> <p>GF20 - ... - U/O</p> <p>GF20H - ... - U/O</p>		<p>06</p> <p>06</p> <p>06</p>
	<p>Glavna sklopka - crna ručica i prednja ploča</p> <p>Main switch - black handle and front plate</p>	<p>GF10H - ... - U</p> <p>GF20 - ... - U/O</p> <p>GF20H - ... - U/O</p>		<p>23</p> <p>23</p> <p>23</p>	
SKLOPKA SA ZAKLJUČAVANJEM LOKOTOM	<p><i>SWITCH WITH PADLOCK</i></p> 	<p>Ručica i prednja ploča iste boje</p> <p><i>The same colour of handle and front plate</i></p>	<p>GF10H - ... - U</p> <p>GF20 - ... - U/O</p>		<p>56</p> <p>56</p>
	<p>Glavna sklopka - crna ručica i prednja ploča</p> <p>Main switch - black handle and front plate</p>	<p>GF10H - ... - U</p> <p>GF20 - ... - U/O</p>		<p>73</p> <p>73</p>	
SKLOPKA SA ZAKLJUČAVANJEM LOKOTOM	<p><i>SWITCH WITH PADLOCK</i></p> 	<p>Glavna sklopka ujedno i sklopka za nužno isklapanje</p> <p>crvena ručica, žuta prednja ploča</p> <p>Main switch with emergency - red handle, yellow front plate</p>	<p>GF10H - ... - U</p> <p>GF20 - ... - U/O</p>		<p>25</p> <p>25</p> <p>25</p>
	<p>Glavna sklopka ujedno i sklopka za nužno isklapanje</p> <p>crvena ručica, žuta prednja ploča</p> <p>Main switch with emergency - red handle, yellow front plate</p>	<p>GF10H - ... - U</p> <p>GF20 - ... - U/O</p>		<p>75</p> <p>75</p>	
SPOJKA ZA VRATA	<p><i>DOOR COUPLING</i></p> 	<p>Otvaranje vrata u bilo kojem položaju / <i>Door opening in any position</i></p> <p>- montaža s 4 vijka (57) / <i>mounting with 4 screws (57)</i></p> <p>- montaža s 2 vijka (57D) / <i>mounting with 2 screws (57D)</i></p>	<p>GF20 - ... - 0</p> <p>GF20H - ... - 0</p> <p>GF20 - ... - 0</p> <p>GF20H - ... - 0</p>		<p>57</p> <p>57</p> <p>57D</p> <p>57D</p>
	<p>Otvaranje vrata u položaju "0" / <i>Door opening in position "0"</i></p> <p>- montaža s 4 vijka (58) / <i>mounting with 4 screws (58)</i></p> <p>- montaža s 2 vijka (58D) / <i>mounting with 2 screws (58D)</i></p>	<p>GF20 - ... - 0</p> <p>GF20H - ... - 0</p> <p>GF20 - ... - 0</p> <p>GF20H - ... - 0</p>		<p>58</p> <p>58</p> <p>58D</p> <p>58D</p>	
SPOJKA ZA VRATA / DOOR COUPLING	<p>SPOJKA ZA VRATA-GLAVNA SKLOPKA I SKLOPKA ZA NUŽNO ISKLAPANJE</p> <p><i>DOOR COUPLING-MAIN SWITCH WITH EMERGENCY OFF</i></p> 	<p>Zaključavanje (1-3) lokota samo u "0" - otvaranje vrata u položaju "0"</p> <p><i>Padlocking (1-3) only in "0" - door opening in position "0"</i></p>	<p>GF20 - ... - 0</p> <p>GF20H - ... - 0</p>		<p>98</p> <p>98</p>
	<p>SPOJKA ZA VRATA-ZAKLJUČAVANJE LOKOTOM</p> <p><i>DOOR COUPLING-SWITCH WITH PADLOCK</i></p> 	<p>Zaključavanje (1-3) lokota samo u "0" - otvaranje vrata u polož. "0"</p> <p><i>Padlocking (1-3) only in "0" - door opening in position "0"</i></p> <p>Ručica i prednja ploča iste boje</p> <p><i>The same colour of handle and front plate</i></p>	<p>GF20 - ... - 0</p>		<p>85</p>
<p>Glavna sklopka ujedno i sklopka za nužno isklapanje</p> <p>crvena ručica, žuta prednja ploča</p> <p>Main switch with emergency - red handle, yellow front plate</p>	<p>GF20 - ... - 0</p>		<p>86</p>		

POSEBNE IZVEDBE *OPTIONAL EXTRAS*

 KOD *CODE*

		1	2	3	4
SKLOPKE SA ZAKLJUČAVANJEM SWITCHES WITH LOCKING		Standardno zaključavanje u "0" - moguće i u drugim položajima (potrebno definirati). Vađenje ključa samo u zaključanom položaju.		GF20H	- ... - U 05
	In standard manner locking is in "0" - possible in other positions, too (please define). The key can be pulled out only in locked position.				
BLOKIRANJE POLOŽAJA-DVORUČNO UPRAVLJANJE BLOCKADE OF POSITIONS-TWO HANDS OPERATING		Zaštita od nehotičnog uklapanja, blokada moguća u svim položajima (potrebno definirati) Protection against an accidental switching-on, blockade is possible in any position (please define)		GF20H	- ... - U 16
	<ul style="list-style-type: none"> • bez zaključavanja i pom. kontakata (16) / without locking and aux. contacts (16) • zaključavanje jednim lokotom (26) / locking by one padlock (26) • jedan par pom. kontakata 1NO+1NC (17) / one pair of aux. contacts 1NO+1NC (17) • zaključavanje jednim lokotom i jedan par pom. kontakata 1NO+1NC (27) locking by one padlock and one pair of aux. contacts 1NO+1NC (27) 		GF20H	- ... - U 26	
			GF20H	- ... - U 17	
			GF20H	- ... - U 27	
			GF20H	- ... - U 27	
SKLOPKA S PRODUŽENOM OSOVINOM SWITCH WITH EXTENDED SHAFT		Standardna izvedba podrazumijeva produženje 100 mm. Specijalnom narudžbom potrebno je definirati dubinu ormara.		GF20	- ... - 0 02
	Standard version includes the extension for 100 mm. Otherwise is necessary to define board depth.		GF20H	- ... - 0 02	
PRODUŽENJE OSOVINE I SPOJKA ZA VRATA EXTENSION SHAFT AND DOOR COUPLING		Otvaranje vrata u položaju "0" / Door opening in position "0"		GF20	- ... - 0 102
	<ul style="list-style-type: none"> • osovina 100 mm (102) / shaft 100 mm (102) • osovina 200 mm (102-200) / shaft 200 mm (102-200) 		GF20H	- ... - 0 102	
PRODUŽENJE OSOVINE I SPOJKA ZA VRATA EXTENSION SHAFT AND DOOR COUPLING		Otvaranje vrata u položaju "0", standardno s jednim modulom Door opening in position "0", standard version with one module		GF20	- ... - U 108D
	<ul style="list-style-type: none"> • dva modula (108D-2) / two modules (108D-2) • tri modula (108D-3) / three modules (108D-3) • četiri modula (108D-4) / four modules (108D-4) 		GF20H	- ... - U 108D	
SKLOPKA ZA NUŽNO ISKLAPANJE EMERGENCY OFF SWITCH		Sklopka sa žutom prednjom pločom, žutom podlogom i crvenom ručicom		GF10	- ... - U 24
	Switch with yellow front plate, yellow escutcheon plate and red handle		GF10H	- ... - U 24	
SKLOPKA ZA NUŽNO ISKLAPANJE EMERGENCY OFF SWITCH		Switch with yellow front plate, yellow escutcheon plate and red handle		GF20	- ... - U/O 24
			GF20H	- ... - U/O 24	
SMANJENJE PREDNJEG SKLOPA SMALLER FRONT PART		Prednji sklop veličine □30 / Front part size □30		GF20R	- ... - U
	Prednji sklop veličine □30 s natpisom / Front part size □30 with title		GF20R	- ... - U N	
	Zaštita IP65 / Front protection IP65		GF20R	- ... - U 51	


POSEBNE IZVEDBE *OPTIONAL EXTRAS*

KOD *CODE*

			1	2	3	4	
MONTAŽA NA ŠINU MOUNTING ON THE RAIL		Montaža na šinu 35 EN 50022 <i>Mounting on the rail 35 EN 50022</i>	GF20	- ... -	U/O	18	
			GF20H	- ... -	U/O	18	
SIGNALNE SVJETILJKE SIGNAL LAMPS		Standardno ugrađena crvena svjetiljka (230V) dolje desno. Mogući naponi 110V, 400V kao i zelena boja svjetiljke (potrebno definirati). <i>In a standard manner, the red lamp (230V) is built in the right bottom corner. Possible voltages are 110V, 400V and green lamp, too (please define).</i>	GF10H	- ... -	U	15	
			GF20	- ... -	U/O	15	
			GF20H	- ... -	U/O	15	
INSTALACIONA KAPA SERVICE COVER		Montaža na šinu 35 EN 50022 s visinskim podešavanjem instalacione kape (45 mm) i ručice za 7 mm <i>Snap on base mounting for the rail 35 EN 50022. Both the service cover (45 mm) and handle are adjustable in height (7 mm).</i>	GF20	- ... -	0	48	
		Fiksna ugradbena dužina (48D) <i>Fixed measure (48D)</i>	GF20	- ... -	0	48D	
INSTALACIONA KAPA SERVICE COVER		Montaža na šinu 35 EN 50022 s visinskim podešavanjem instalacione kape (45 mm) i bravice za 7 mm <i>Snap on base mounting for the rail 35 EN 50022. Both the service cover (45 mm) and key are adjustable in height (7 mm).</i>	GF20	- ... -	0	49	
CENTRALNA MONTAŽA <i>CENTRAL MOUNTING</i>	SKLOPKA S RUČICOM I MATICOM ROTARY CAM SWITCH WITH HANDLE AND NUT		Montaža u Ø30 mm / <i>Mounting in Ø30 mm</i>	GF20	- ... -	U	09
			Montaža u Ø22 mm / <i>Mounting in Ø22 mm</i>	GF20	- ... -	U	11
	SKLOPKA S KLJUČEM I MATICOM ROTARY CAM SWITCH WITH KEY AND NUT		Montaža u Ø30 mm / <i>Mounting in Ø30 mm</i>	GF20	- ... -	U	10
			Montaža u Ø22 mm / <i>Mounting in Ø22 mm</i>	GF20	- ... -	U	12
	SKLOPKA S RUČICOM I PREDNJOM PLOČOM □48 ROTARY CAM SWITCH WITH HANDLE AND FRONT PLATE □48		Montaža u Ø22 odnosno Ø30 mm. Montaža s dva vijka. <i>Mounting into Ø22 or Ø30 mm with two screws</i>	GF20	- ... -	U	20

POSEBNE IZVEDBE *OPTIONAL EXTRAS*

 KOD *CODE*

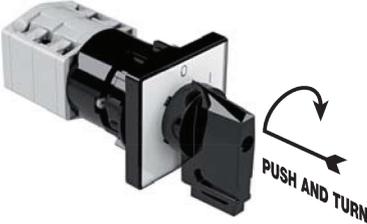		1	2	3	4			
CENTRALNA MONTAŽA <i>CENTRAL MOUNTING</i>	SKLOPKA SA ZAKLJUČAVANJEM ROTARY CAM SWITCH WITH LOCKING 	Utična montaža kontaktnog bloka i prednjeg sklopa <i>Snap-on mounting of contact block with front part</i>						
		Brza montaža u Ø22 mm, sklopka s prednjom pločom, ručica za zaključavanje / <i>Quick mounting into Ø22 mm, switch with front plate, lockable handle</i>	GF20	-	...	-	U	41D
		Brza montaža u Ø22 mm, ručica za zaključavanje, sklopka bez prednje ploče / <i>Quick mounting into Ø22 mm, lockable handle, switch without front plate</i>	GF20	-	...	-	U	41K
CENTRALNA MONTAŽA <i>CENTRAL MOUNTING</i>	SKLOPKA S RUČICOM I PREDNJOM PLOČOM ROTARY CAM SWITCH WITH HANDLE AND FRONT PLATE 	Utična montaža kontaktnog bloka i prednjeg sklopa <i>Snap-on mounting of contact block with front part</i>						
		Brza montaža u Ø16 mm / <i>Quick mounting in Ø16 mm</i>	GF10	-	...	-	U	46
		Brza montaža u Ø22 mm / <i>Quick mounting in Ø22 mm</i>	GF10	-	...	-	U	47
			GF20	-	...	-	U	47
CENTRALNA MONTAŽA <i>CENTRAL MOUNTING</i>	SKLOPKA BEZ PREDNJE PLOČE ROTARY CAM SWITCH WITHOUT FRONT PLATE 	Utična montaža kontaktnog bloka i prednjeg sklopa <i>Snap-on mounting of contact block with front part</i>						
		Brza montaža u Ø16 mm / <i>Quick mounting in Ø16 mm</i>	GF10	-	...	-	U	66
		Brza montaža u Ø22 mm / <i>Quick mounting in Ø22 mm</i>	GF10	-	...	-	U	67
			GF20	-	...	-	U	67
CENTRALNA MONTAŽA <i>CENTRAL MOUNTING</i>	PUSH AND TURN 	Zaključavanje (1-3 lokota) in "0" / <i>Padlocking (1-3) in "0"</i>						
		Brza montaža u Ø22 mm / <i>Quick mounting in Ø22 mm</i>	GF20	-	...	-	U	71
		Brza montaža u Ø30 mm / <i>Quick mounting in Ø30 mm</i>	GF20	-	...	-	U	72
CENTRALNA MONTAŽA <i>CENTRAL MOUNTING</i>	SKLOPKA S KLJUČEM ROTARY CAM SWITCH WITH KEY 	Utična montaža kontaktnog bloka i prednjeg sklopa <i>Snap-on mounting of contact block with front part</i>						
		Brza montaža u Ø22 mm, sklopka s prednjom pločom <i>Quick mounting in Ø22 mm, switch with front plate</i>	GF20	-	...	-	U	29D
		Brza montaža u Ø22 mm, sklopka bez prednje ploče <i>Quick mounting in Ø22 mm, switch without front plate</i>	GF20	-	...	-	U	29K
NESTANDARDNA MONTAŽA <i>NON-STANDARD MOUNTING</i>		Montaža s dva vijka (razmak 28 mm) <i>Mounting with two screws (distance 28 mm)</i>	GF20	-	...	-	U	39D
			GF20H	-	...	-	U	39D
		Montaža s dva vijka (razmak 30 mm) <i>Mounting with two screws (distance 30 mm)</i>	GF20	-	...	-	U	39T
NESTANDARDNA MONTAŽA <i>NON-STANDARD MOUNTING</i>		Montaža s 4 umetnute matice M4 <i>Mounting with four inserted nuts M4</i>	GF20	-	...	-	U	31
			GF20H	-	...	-	U	31


NARUDŽBENI KOD *ORDERING CODE*

Prilikom naručivanja sklopke potrebno je definirati:

- za **standardnu izvedbu** sklopke 3 tipa podataka **1 2 3**
- za sklopke s **posebnom izvedbom** maksimalno 5 tipova podataka **1 2 3 4 5**
- za sklopku sa **specijalnim zahtjevima** maksimalno 6 tipova podataka **1 2 3 4 5 Y**

When ordering please define:

- for **standard** switch three data types **1 2 3**
- for switch with an **optional extra** max. 5 data types **1 2 3 4 5**
- for switch with **special requests** max. 6 data types **1 2 3 4 5 Y**

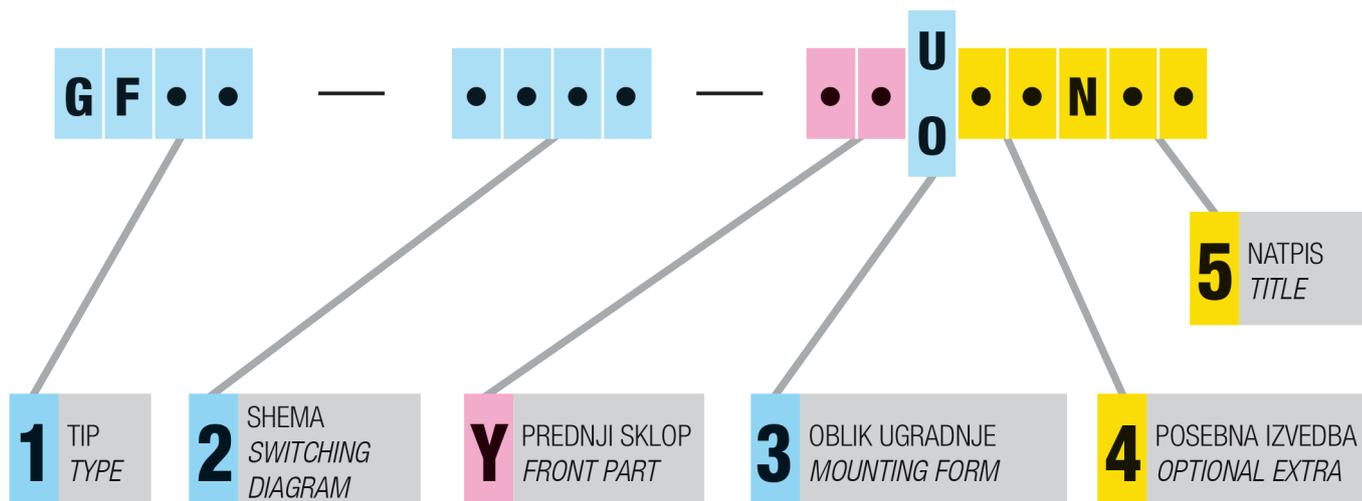

OPIS

DESCRIPTION


1	Tip sklopke. Odabire se prema tehničkim zahtjevima i ugradnoj veličini (vidi str. 1)	Switch type. To be chosen in accordance with the technical requests and mounting size (see page 1)
2	Shema. Odabire se prema programu sklapanja (vidi katalog shema)	Switching diagram. To be chosen in accordance with the switching programme (see catalogue with scheme).
Y	Prednji sklop. Upisuje se samo ako se traži nestandardna kombinacija boja i oblika prednjeg sklopa. Kod standardne izvedbe (ručica, prednja ploča i slova na bijeloj podlozi su crni).	Front part. To be marked only when non-standard front part colour and form combination is required. For standard form (handle, front plate and text on the white escutcheon plate are black).
3	Standardni oblici ugradnje U, 0 (vidi str. 2)	Standard mounting forms U, 0 (see page 2)
4	Posebna izvedba (vidi str. 2, 3, 4 i 5)	To be marked when an optional extra is required (see pages 2, 3, 4 and 5).
5	"N" se upisuje ako se traži prednja ploča s natpisom. Potrebno je upisati željeni tekst.	"N" is to be written when the front plate with a title is required. Please define required text.




Pridržavamo pravo promjene podataka. Ostale podatke dajemo na upit
 We keep the right to change the data. Other data are given on request.

MJERNE SKICE *DIMENSIONAL DRAWINGS* (mm)


GF10 Ugradna sklopka
Front mounting (U)

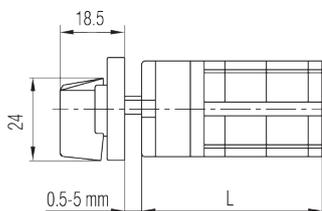


GF20 Ugradna sklopka / *Front mounting (U)*
Sklopka za odvojenu ugradnju / *Rear mounting (O)*

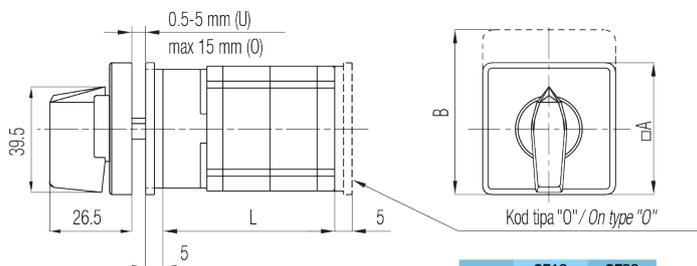

	GF10	GF20
□A	30	48
B	40	60





GF20 Samo na prednjoj ploči
Only on the front panel




GF10H Ugradna sklopka / *Front mounting (U)*

GF20H Ugradna sklopka / *Front mounting (U)*
Sklopka za odvojenu ugradnju / *Rear mounting (O)*



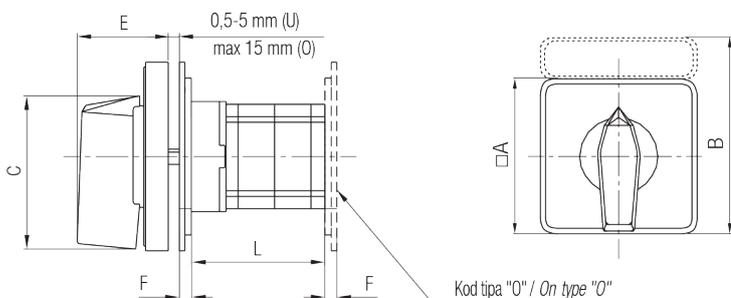


GF20H Samo na prednjoj ploči
Only on the front panel




OZNAKA MARKING	TIP SKLOPKE TYPE	
	GF10H	GF20H
□A	48	65
B	60	80
C	39,5	53
E	26,5	34,5
F	-	5,5 5,5
TIP UGRADNJE MOUNTING FORM		
	U	U 0


GF20R Ugradna sklopka / *Front mounting (U)*

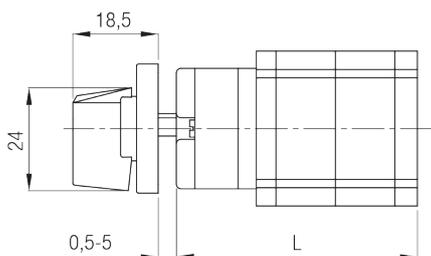


Posebne izvedbe *Optional extras*




Montaža na šinu - **18**
Mounting on the rail - 18



Centralna ugradnja - **20**
Central mounting - 20

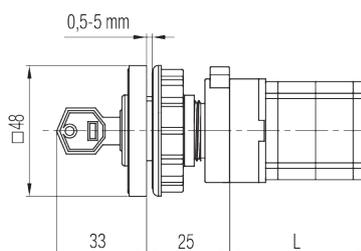


Centralna ugradnja - **29D**
Central mounting - 29D




Centralna ugradnja - **29K**
Central mounting - 29K

MJERNE SKICE *DIMENSIONAL DRAWINGS* (mm)


Posebne izvedbe *Optional extras*




Centralna ugradnja - **09/11**
Central mounting - 09/11

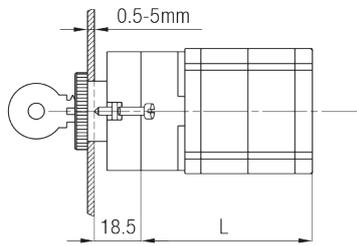


Centralna ugradnja - **10/12**
Central mounting - 10/12




Tip/Type	ØD
09, 10, 20	30.5
11, 12, 20, 29D, 29K	22.5



Spojka za vrata -
zaključavanje lokotom - **85**
*Door coupling -
padlock - 85*




Spojka za vrata -
zaključavanje lokotom - **98**
*Door coupling -
padlock - 98*

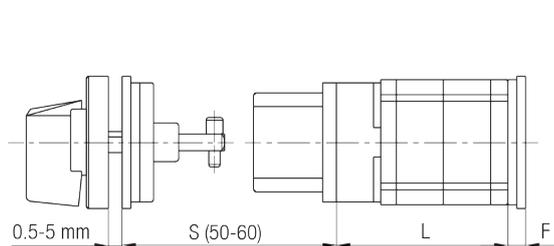


Spojka za vrata - **57/58**
Door coupling - 57/58

Ukoliko je traženi "S" veći od standardnog, potrebno je definirati dubinu ormara "S+L+F"
When required "S" is bigger than offered, it is necessary to define the depth of the board "S+L+F"




Samo na prednjoj ploči
Only on the front panel


OZNAKA MARKING	GF20	GF20H
□K	36	48
F	5	5,5



Sklopka sa zaključavanjem lokotom - **06/23/25**
Switch with padlock - 06/23/25

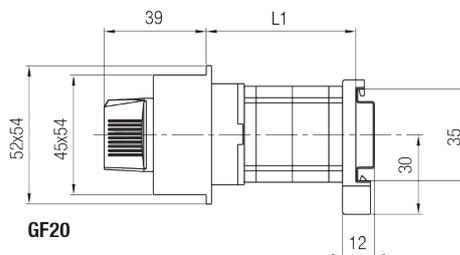

Instalaciona kapa - **48/48D**
Service cover - 48/48D




Centralna montaža - **46/47 i 66/67**
Central mounting - 46/47 and 66/67

OZNAKA MARKING	GF10H GF20	GF20H
□C	48	65
E	34,2	38
G	5	6
F	5 (GF20)	5,5

	1 elem.	2 elem.	3 elem.	
L1	48	49-56	62-69	76-83
	48D	40	53,5	67

POSEBNA IZVEDBA OPTIONAL EXTRA	ØD
46, 66	16
47, 67	22



Broj elemenata <i>No. of elements</i>	1	2	3	4	5	6	7	8	9	10	11	12	
L (mm)	GF10	40	52	64	76	88	100	112	124	-	-	-	
	GF20	36	49,5	63	76,5	90	103,5	117	130,5	144	157,5	171	184,5
	GF10H	40	52	64	76	88	100	112	124	-	-	-	
	GF20H	36	49,5	63	76,5	90	103,5	117	130,5	144	157,5	171	184,5
	GF20R	41,5	53,5	67	80,5	94	107,5	-	-	-	-	-	-

■ ROTARY CAM SWITCHES GF SERIES



www.LovatoElectric.hr

LOVATO ELECTRIC d.o.o.
Borongajska cesta 81 b
10002 ZAGREB
HRVATSKA
Tel +385 (0)1 2369 243, 2369 203
prodaja@LovatoElectric.hr
www.LovatoElectric.hr



Follow us

The products described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in the leaflet are to be considered as purely illustrative, and consequently have no contractual relevance. Remember also that the products themselves must be used by qualified personnel, in compliance with current plant engineering and installation standards, in order to avoid injury to persons or damage to property.